



## 四列圆锥滚子轴承 Four-row Tapered Roller Bearing

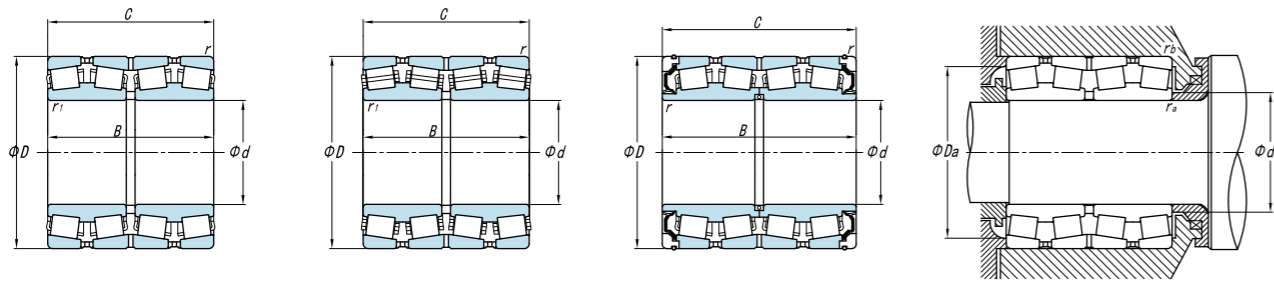


基本尺寸 Principal Dimensions (mm)						基本额定负荷 Basic Load Ratings (kN)		现代号 New code	重量 Mass (kg)
d	D	B	T	r <sub>min</sub>	r <sub>1min</sub>	C <sub>r</sub>	C <sub>or</sub>		
139.7	200.025	157.162	160.338	1.1	1.8	580	1870	3806/139.7/HC	16.2
150	210	165	165	0.7	2.3	650	1590	382930X2	21.2
	225	136	136	3	2.5	590	1460	380630	17.7
170	260	230	230	3	2.5	1020	3100	382034X2	43
	260	230	230	3	2.5	1020	3100	382034X2	43
180	280	180	180	3	2.5	910	2540	380636	39.6
200	310	200	200	3	2.5	1500	2170	382040X2	55.6
	310	275	275	3	2.5	1340	4200	382040	75.1
205	320	205	205	4	3	1150	2850	380641	55.4
220	340	305	305	4	3	2780	5950	382044X2	99.5
240	360	310	310	4	3	3300	6100	382048X2	90.5
250	460	270	270	5	4	2450	6400	380650	192
260	360	265	265	3	2.5	1730	5050	382952/HC	77.8
	400	255	255	3.7	7.5	2050	4950	380652	117
	400	345	345	5	4	2850	7700	82052	161
	440	300	300	2	5	2670	5850	777752	182
280	420	250	250	5	5	1680	5300	380656	119
300	420	310	310	4	3	2020	8100	382960X2/C9YA3	134

## 四列圆锥滚子轴承 Four-row Tapered Roller Bearing

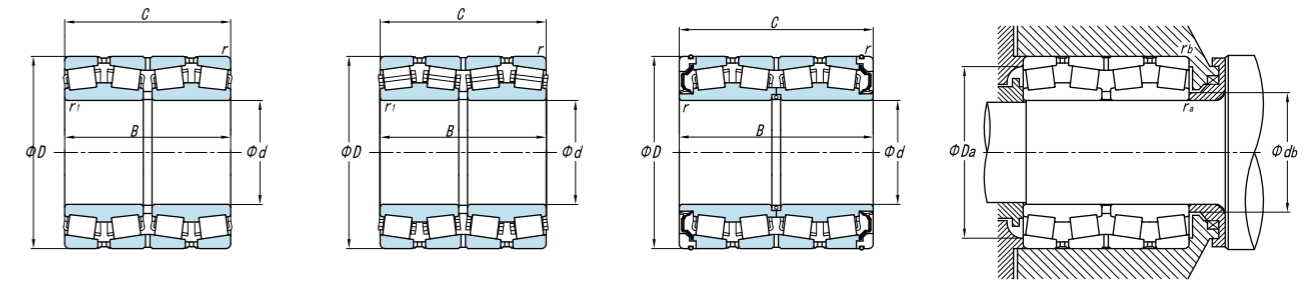


基本尺寸 Principal Dimensions (mm)						基本额定负荷 Basic Load Ratings (kN)		现代号 New code	重量 Mass (kg)
d	D	B	T	r <sub>min</sub>	r <sub>1min</sub>	C <sub>r</sub>	C <sub>or</sub>		
300	460	390	390	5	4	3850	10200	382060	222
	500	350	350	5	4	2730	8900	380660/HCC9	280
320	480	380	380	5	4	3200	11500	382168X2	252
	460	310	310	4	4	2200	9300	382968X2	147
340	520	325	325	5	4	3500	8200	381068	247
	480	375	375	4	4	2550	11800	382972X2	197
360	600	420	420	4.7	4.7	3950	13500	381172	388
380	550	330	350	5	5	2490	9450	380676-1	273
	620	388	388	6	6	3450	11600	380676	443
	620	420	420	5	4	5050	12600	381176/HC	484
	620	420	420	5	4	5050	12600	381176/HCC9	485
395	545	268.7	288.7	4	7.5	2130	6500	77779	194
	545	268.7	288.7	4	7.5	2130	6500	77779U	194
400	540	280	280	3.7	7.5	2680	6500	7780	187
	540	400	400	5	5	6350	13300	380680/HC	262
	600	356	356	5	4	4900	12400	381080/HC	345
420	560	437	437	5	5	7880	16300	380684/HC	298
	700	480	480	6	5	10500	11900	381184	755
440	620	454	454	6	6	6600	18800	77888U	432
	620	454	454	6	6	6600	18800	77888	432
	650	355	355	6	5	3650	12100	77788	385

## 四列圆锥滚子轴承 Four-row Tapered Roller Bearing

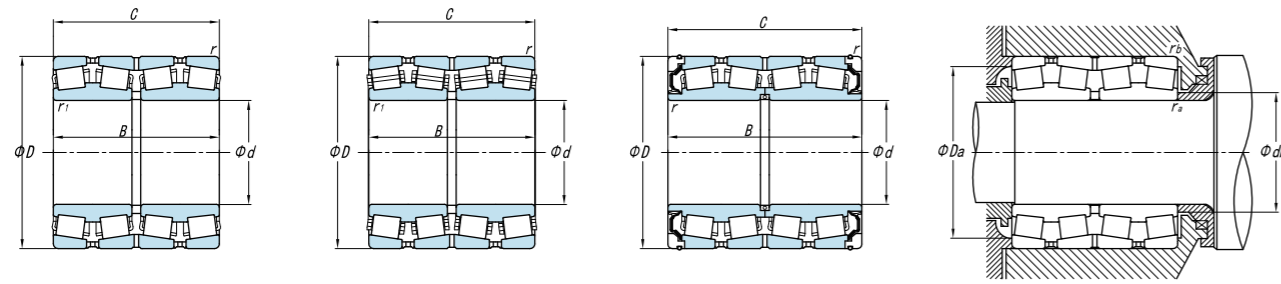

基本尺寸 Principal Dimensions (mm)						基本额定负荷 Basic Load Ratings (kN)		现代号 New code	重量 Mass (kg)
d	D	B	T	r <sub>min</sub>	r <sub>1min</sub>	C <sub>r</sub>	C <sub>or</sub>		
440	650	355	355	6	6	3650	12100	77788K	385
	650	355	355	6	5	4550	12300	381088X2/HG	403
460	620	310	310	5	4	3650	10000	381992/HC	260
	620	310	310	5	4	3650	10000	381992/HCC9	260
	650	474	474	6	6	4500	20000	380692/HCC9	506
	730	440	440	4	7.5	5600	14800	381192X3/HC	663
	730	440	440	4	7.5	5600	14800	381192X3/HCC9	663
480	700	420	420	5	5	4730	16900	381096	582
490	625	385	385	7	4	4900	16500	380698/HC	278
530	780	450	450	6	5	7200	18200	3810/530	745
540	690	400	400	2	5	5700	11400	779/540	375
560	750	368	368	5	4	7850	15800	3819/560/HC	447
	920	620	620	7.5	6	20000	32000	3811/560	1690
600	800	365	365	5	5	4000	18100	3806/600	489
	870	480	480	6	6	8500	27500	3810/600/HC	992
	980	650	650	7.5	7.5	9650	37500	3811/600	1970
630	850	418	418	6	6	6600	22100	3819/630/HC	682
	920	515	515	7.5	7.5	6550	27500	3810/630	1190
	1030	670	670	7.5	6	16500	42000	3811/630/HC	2200
650	1030	560	560	7.5	12	16000	39300	777/650K	1735

## 四列圆锥滚子轴承 Four-row Tapered Roller Bearing

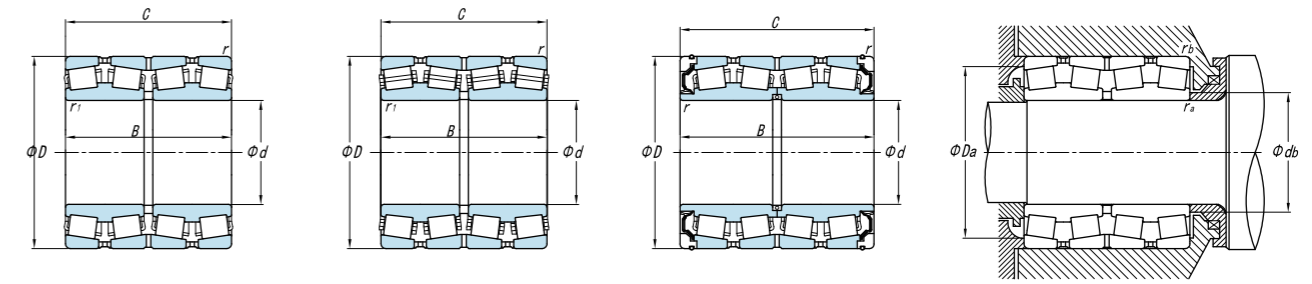

基本尺寸 Principal Dimensions (mm)						基本额定负荷 Basic Load Ratings (kN)		现代号 New code	重量 Mass (kg)
d	D	B	T	r <sub>min</sub>	r <sub>1min</sub>	C <sub>r</sub>	C <sub>or</sub>		
650	1030	560	560	7.5	12	17600	39300	777/650	1720
	1030	560	560	7.5	12	17600	39300	777/650U	1723
	1030	560	560	7.5	12	16000	39300	777/650UY	1712
660.01	855.015	319.99	319.99	12	5.2	4750	17000	3806/660X4/HC	495
670	900	412	412	6	6	5250	24600	3819/670	773
710	900	410	410	3	6	5880	27500	779/710	650
750	1220	840	840	9.5	9.5	17700	68500	3811/750	3985
780	1220	840	840	6	6	21100	70500	3806/780/HCC9	3810